



LANCER *LED Light*

Contents

CONTENTS

Introduction to Lancer series	02
Lancer B500	13
Lancer B1000	15
Lancer B1500	17
Lancer accessories	19

LANCER LED Light

B1500 / B1000 / B500

LANCER debuts, to create a highlight era



B1500

B1000

B500



Up to 1500W stable ultra-high power output

LANCER series ranging 500W-1500W is created by a professional programming team with intelligent control technology and new high light COB technology. To improve brightness for various applications, the R&D team self-developed innovative reflector.



B1500



B1000



B800

Super-bright, bi-color and stable

LANCER series LED lights feature customized LED lamp beads to maintain high brightness and ensure the accurate color temperature; its CCT ranges from 2700K to 6500K, which can achieve accurate adjustment of cold and warm colors; LANCER LED lights have high color rendering and provide higher quality white light, so the light generated by LANCER LED lights can be more in line with the surrounding environment and more natural.



Power supply control

Due to the separation of the lamp from the power supply, LANCER series has high heat dispersion performance. The integrated perfect power supply management system is embedded with a high-quality high-power all-weather waterproof power supply case, and provided with an aluminum profile structure to ensure heat dispersion and waterproof property.



Efficient heat dissipation and super quiet effect

LANCER series is equipped with an excellent temperature control system having a new heat radiation structure developed based on new a heat dissipation concept. With the structure consisting of heat tubes, fins, and vapor chamber, and the unique air inlet and outlet design, the heat conduction and heat dissipation efficiencies of LANCER LED lights are greatly improved, which fully ensures luminous efficiency, color accuracy and stability of LED during long-time operation. The customized noiseless fan is designed for stringently controlling the lamp noise and ensuring high-quality sound effects on set.

Smart, and multi-mode control

LANCER series features a variety of communication control modes allowing direct connection with APP through Bluetooth and WiFi, or with WDMX or Lumenradio CRMX to achieve wired and wireless controls, thus improving shooting efficiency and applying in any case.



Bluetooth



CRMX



WiFi



Wireless
DMX/RDM




Wired
DMX/RDM



Ultra-high color rendering index

LANCER series bi-color LED lights are designed according to high standards for color reproduction. With strict control over the light source quality, CRI and TLCI indexes of COB LED are all more than 97 to provide truer and more natural color in the camera for everything, creating an original color atmosphere and wonderful light and shadow experience.

CRI	TLCI	TM-30 Rg	TM-30 Rf	R9	R15
Aver. 97	Aver. 97	Aver. 94	Aver. 98	> 90	> 90

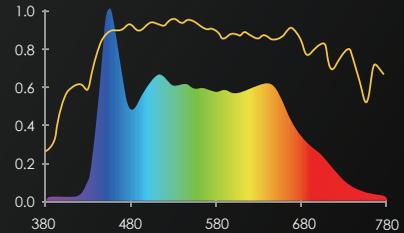

					
98.64	98.64	99.73	99.24	98.41	99.61
					
98.52	99.37	99.55	96.31	99.47	99.61
					
97.20	99.92	99.96	99.94	98.17	96.75
					
96.30	97.24	98.21	98.85	99.36	99.72

Universal Bowens bayonet mount

Original fastening structure, easy-installation soft light box, reflectors, Fresnel lens and other accessories are all designed with Bowens bayonets for purposes of firm connection and multi-dimensional and all-round light control.



Unique and easy-use operation panel

Benefiting from novel UI design, sophisticated interface layout and the simulation of 10 scenarios, such as paparazzo, lightning, clouds, broken light bulbs, TV, etc., according to the use habits and experience, the users can adjust luminous frequency and brightness and control the LED light conveniently to achieve colorful application according to their needs.



Multiple dimming curves usable freely

Five dimming curves, including linear/S-curve/exponential/logarithmic/TV, are available for the lighting engineers to achieve convenient and efficient dimming.



Linear



S curve



Exponential



TV



Logarithmic



Weather protection

Weather protection is provided for LANCER series spotlights and their power supply by the novel and unique waterproof structure with high-efficiency water drainage and diversion ability, sophisticated external packing technology and the all-around protection of internal core components, so that the spotlights and their power supply have all-weather protection capability, and can be used to complete video production in harsh environment.



Multiple light effects and customized creativity

Ten light effects, including paparazzo, lightning, cloud, broken light bulb, TV sets, candlelight, fire, firework, explosion and welding, are provided, and their parameters can be adjusted on the lamp and APP to easily change the light effects for scenario simulation and assistance in creative production.

LANCER B500

1. High brightness and 500W continuous output;
2. Color temperature 2700K-6500K, CRI: 97, TLCI: 96;
3. Independent power supply, safety output and IP54 protection;
4. Standard professional LED reflector, brightening;
5. Bowens bayonet mount for light control accessories;
6. Built-in USB interface to support firmware upgrade;
7. Multiple communication methods;
8. Multiple power supply DC/AC.



B500 lamp and power supply (with standard reflector)

Standard configuration

01* lamp, 01* power box, 01*10m power cable, 01*6m connection cable, 01*COB protection cover, 01* case, 01* standard reflector, 01*35 circular pipe clamp, 01* manual (with 01*DMX channel table) .

Optional



Wide reflector



Narrow reflector



Softbox



Lantern



Octagonal softbox



Fresnel lens

LANCER B500

Technical parameters

Model	Lancer B500
Rated power	Max.500w
Input voltage	DC 22-36V, AC 100-240V 50/60Hz
CRI	CRI>97, TLCI>97
Color temperature	2700K-6500K
Dimming range	0% -100%, accuracy 0.1% adjustable
Control mode	Lamp control, CRMX, APP, wired DMX, wireless DMX
Dimming mode	Linear/S-curve/exponential/logarithmic /TV
Light effects	10
Dimension	Lamp (excluding support) : 290x168x184mm; Power supply: 117x128x282mm
Weight	Lamp: 2.8kg Power supply: 1.6kg

Illumination

Color temperature	3200K			5600K		
	1m	2m	3m	1m	2m	3m
Naked lamp	10800 lux	2750 lux	1430 lux	12400 lux	3200 lux	1570 lux
With standard reflector	109800 lux	24800 lux	10500 lux	132000 lux	28500 lux	12400 lux

LANCER B1000

1. Color temperature 2700K-6500K, CRI: 97, TLCI: 96;
2. High brightness and 1000W constant output;
3. Independent power supply, safety output and IP54 protection;
4. Standard professional LED reflector, brightening;
5. Bowens bayonet mount for light control accessories;
6. Built-in USB interface to support firmware upgrade;
7. Multiple communication methods;
8. Multiple power supply DC/AC.



B1000 lamp and power supply (with standard reflector)

Standard configuration

01* lamp, 01* power box, 01*10m power cable, 01*6m connection cable, 01*COB protection cover, 01* case, 01* standard reflector, 01*35 circular pipe clamp, 01* manual (with 01*DMX channel table) .

Optional



Wide reflector



Narrow reflector



Softbox



Lantern



Octagonal softbox



Fresnel lens

LANCER B1000

Technical parameters

Model	Lancer B1000
Rated power	Max.1000w
Input voltage	DC 22-36V, AC 100-240V 50/60Hz
CRI	CRI>97, TLCI>97
Color temperature	2700K-6500K
Dimming range	0% -100%, accuracy 0.1% adjustable
Control mode	Lamp control, CRMX, APP, wired DMX, wireless DMX
Dimming mode	Linear/S-curve/exponential/logarithmic /TV
Light effects	10
Dimension	Lamp (excluding support) : 302x190x196mm; Power supply: 170x142x302mm
Weight	Lamp: 6.1kg Power supply: 2.5kg

Illumination

Color temperature	3200K			5600K		
	1m	3m	5m	1m	3m	5m
Naked lamp	21800 lux	2680 lux	1080 lux	25600 lux	3010 lux	1260 lux
With standard reflector	183000 lux	15800 lux	6030 lux	212000 lux	18600 lux	6580 lux

LANCER B1500

1. High brightness and 1500W constant output;
2. Color temperature 2700K-6500K, CRI: 97, TLCI: 96;
3. Independent power supply, safety output and IP54 protection;
4. Standard professional LED reflector, brightening;
5. Bowens bayonet mount for light control accessories;
6. Built-in USB interface to support firmware upgrade;
7. Multiple communication methods.



B1500 Lamp and power supply (with standard reflector)

Standard configuration

01* lamp, 01* power box, 01*10m power cable, 01*6 m connection cable, 01*COB protection cover, 01* case, 01*standard reflector, 01*35 circular pipe clamp, 01* manual (with 01*DMX channel table) .

Optional



Wide reflector



Narrow reflector




Softbox



Lantern



Octagonal softbox



Fresnel lens

LANCER B1500

Technical parameters

Model	Lancer B1500
Rated power	Max.1500w
Input voltage	AC 100-240V 50/60Hz
CRI	CRI>97, TLCI>97
Color temperature	2700K-6500K
Dimming range	0% -100%, accuracy 0.1% adjustable
Control mode	Lamp control, CRMX, APP, wired DMX, wireless DMX
Dimming mode	Linear/S-curve/exponential/logarithmic /TV
Light effects	10
Dimension	Lamp (excluding support) : 496x269x247mm; Power supply: 394x156x157mm
Weight	Lamp: 12.4kg Power supply: 5kg


Illumination

Color temperature	3200K			5600K		
	3m	5m	7m	3m	5m	7m
Naked lamp	5200 lux	2080 lux	1250 lux	6180 lux	2520 lux	1430 lux
With standard reflector	23200 lux	8460 lux	4320 lux	28600 lux	10100 lux	5220 lux

Focus on high quality and diversification

LANCER series accessories

Universal Bowens bayonet mounts are designed for whole LANCER series to provide compatibility with various accessories, such as reflector, soft box, Fresnel lens, which meets the requirements of most film makers and video producers.

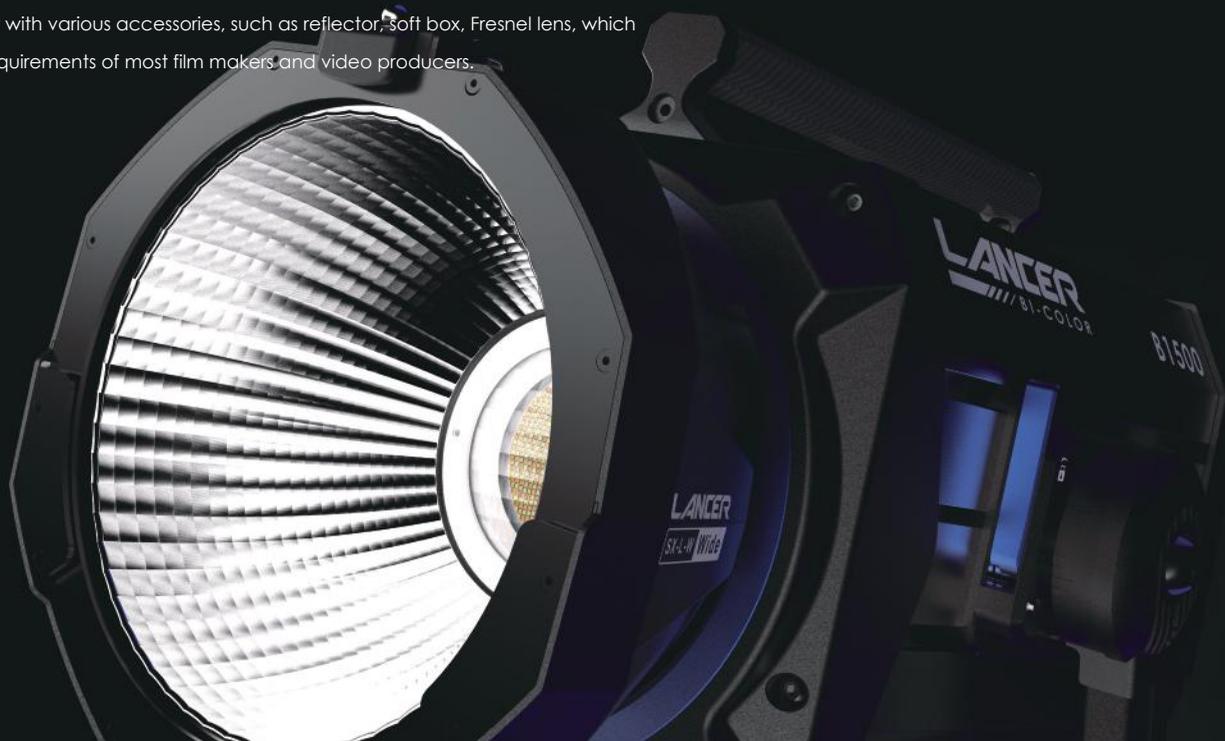



Wide reflector

Model: SX-L-W
External dimension: Φ 188mm x161mm
Weight: 0.3kg
Optional fixture: Universal Bowens bayonet mount



Middle reflector

Model: SX-L-M
External dimension: Φ 196mm x189mm
Weight: 0.5kg
Optional fixture: Universal Bowens bayonet mount



Narrow reflector

Model: SX-L-N
External dimension: Φ 247mm x 304mm
Weight: 0.8kg
Optional fixture: Universal Bowens bayonet mount



22" Lantern

Model: SX-DM-22
Unfold dimension: 650x650x560mm/25.5x25.5x22"
Folding dimension: 180x180x810/7x7x32"
Optional fixture: Universal Bowens bayonet mount



30" Lantern

Model: SX-DM-30
Unfold dimension 900x900x700mm/35.4x35.4x27.5"
Folding dimension: 180x180x1150mm/7x7x45"
Optional fixture: Universal Bowens bayonet mount



LB90 Rectangle Softbox

Model: SX-LB-90
External dimension: 220x900mm xD370mm
Weight: 0.94kg
Optional fixture: Universal Bowens bayonet mount
Accessory: eggcrate



LB120 Rectangle Soft box

Model: SX-LB-120
 External dimension: 300x1200mm x D410mm
 Weight: 1.3kg
 Optional fixture: all-purpose Bowens bayonet
 Accessory: eggcrate



SL90 deep soft box

Model: SX-L-90
 External dimension: $\Phi 900 \times 620$ mm
 Weight: 0.9kg
 Optional fixture: all-purpose Bowens bayonet
 Accessory: eggcrate



SL120 deep soft box

Model: SX-L-120
 External dimension: $\Phi 1200 \times 720$ mm
 Weight: 1.1kg
 Optional fixture: all-purpose Bowens bayonet
 Accessory: eggcrate



SL100 octagonal soft box

Model: SX-SL-100
 Unfold dimension: $\Phi 1000 \times 470$ mm
 Weight: 1.2kg
 Optional fixture: all-purpose Bowens bayonet
 Accessory: eggcrate



SL150 octagonal soft box

Model: SX-SL-150
 Unfold dimension: $\Phi 1500 \times 560$ mm
 Weight: 1.8kg
 Optional fixture: all-purpose Bowens bayonet
 Accessory: eggcrate



LS10 Fresnel lens

Model: SX-LS-10
 External dimension: 295x295x135mm
 Weight: 3kg
 Optional fixture: all-purpose Bowens bayonet
 Accessory : four-leaf barn door

Contact Us

Sunnyxiao Headquarter

4/F, Building B, Huafeng Int'l. Robot Ind'l. Pk., Hangcheng Avenue, Xixiang Street, Baoan District, Shenzhen. Postcode: 518000
+86 755 2300 8852
business@sunnyxiao.com

Sunnyxiao Factory

Room 201, Entry A, Building E, Section 5, Ganghuaxing Industrial Park, Yongfu Road, Bao'an District, Shenzhen
+86 755 2300 8852

Qingdao Office

Room 1502, T1, Excellence Century Center, No. 31, Longcheng Road, Shibei District, Qingdao
0532-8566 3683

Hengdian Office

Floor 1, No. 91-2, Tongle Street, Jingxi Community, Hengdian Town, Dongyang City, Jinhua City, Zhejiang Province
+86 755 2300 8852

Beijing Office

5-5 Renhe Science Park, Liando U Valley, Renheyuan 2nd Street, Shunyi District, Beijing
+86 755 2300 8852

Shanghai Office

Building 37, Shanghai Carbon Plant, 4221 Longwu Road, Minhang District, Shanghai
+86 755 2300 8852

German Office

Wöhlerweg 5, 82538 Geretsried, Germany
+49 8171 999 2110



Official website



Official Account